


SUGGESTED MTG. HOLE .228 DIA.

LEAD FINISH: SILVER	
BUSHING FINISH: SILVER	
CAPACITANCE	3000 pF MIN.
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	85°C --- VDC MAX. 125°C 200 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
1	---
50	32
100	45
1 GHz	70
10 GHz	--

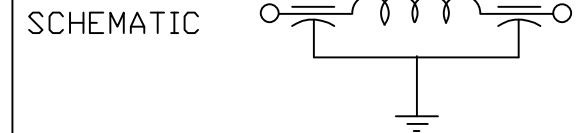

MARKING:
 PART: S1201054
 BAG: SCI
 1201-054
 DATE CODE
 QTY./BAG
 (50 / BAG MAX.)

	6	5	4	3	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	 ERIE, FAIRVIEW PENNSYLVANIA SPECTRUM CONTROL INC.
	CN 37798-ENG	CN 202986 REDRAWN	CN 199855	CN 185003 REDRAWN	CHANGE NOTICE	Fractions ± 1/64	
						Dec. .xx±	
						Dec. .xxx± .010	
						Angles ±0° 30'	
						CODE IDENT. NO. DLSP2	Dwn. KRDZALIC Ckd. 10-15-07 Scale NONE
							Description FILTER, SING, Pi, BSHG 1201-054

