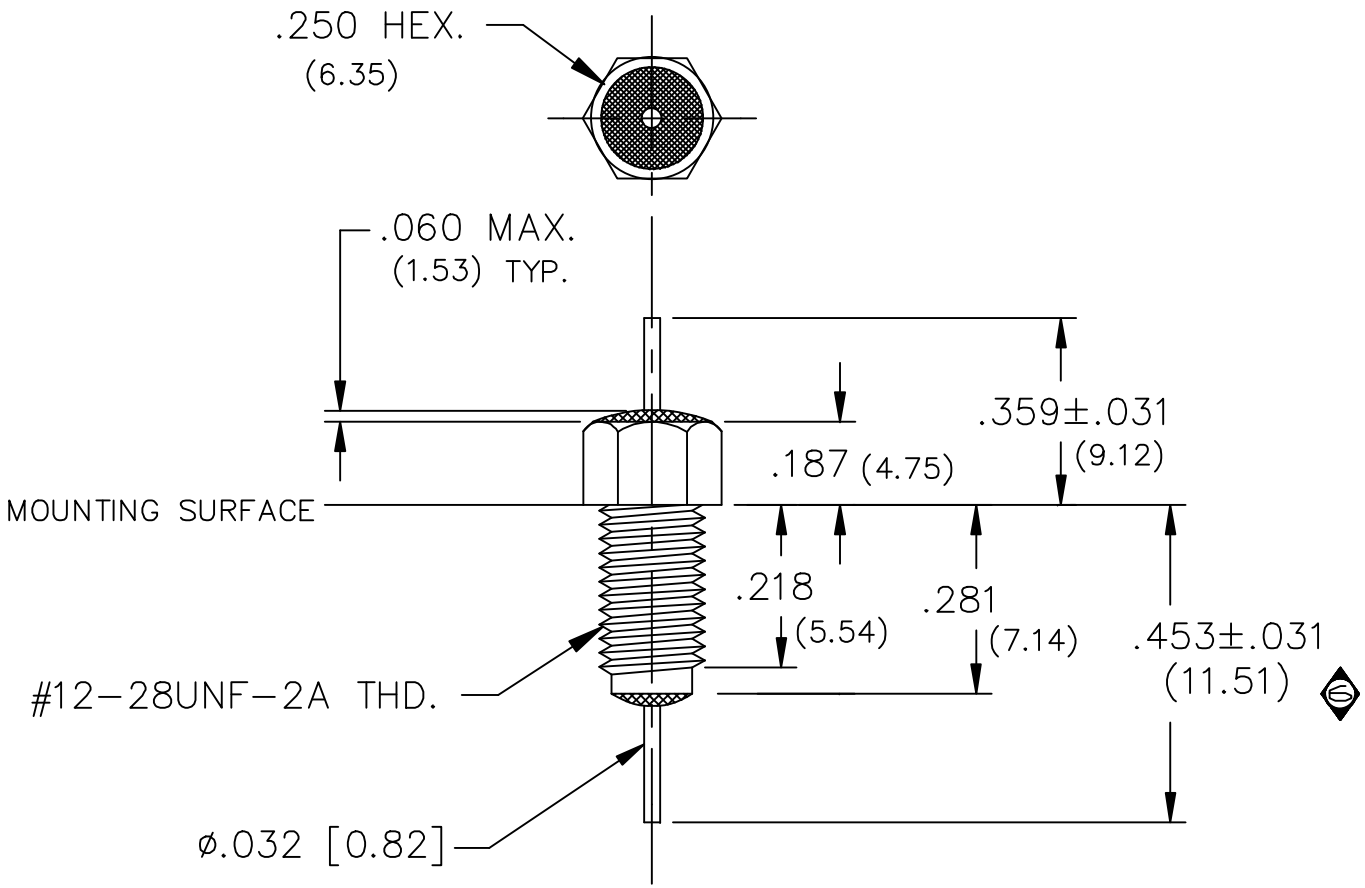

NOTES:

1. HARDWARE IS INCLUDED
2. SUGGESTED MTG. HOLE .228 DIA.

LEAD FINISH:	SILVER
BUSHING FINISH:	SILVER
CAPACITANCE	3000 pF GMV
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	85°C 350 VDC MAX. 125°C 200 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.

MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD

FREQ. MHz	I.L. (db)
1	---
10	5
100	45
1 GHz	70
10 GHz	--

SCHEMATIC



MARKING:
PART:
SCI 1201-052
BAG:
1201-052
DATE CODE
QTY./BAG
(100/ BAG MAX.)

REV. NO.	CHANGE NOTICE
6	CN 202459
5	CN 200613
4	CN 193706
3	CN 185003 REDRAWN

TOLERANCES UNLESS OTHERWISE SPECIFIED
Fractions ± 1/64
Dec. .xx±
Dec. .xxx± .010
Angles ±0° 30'
CODE IDENT. NO. OLSP2

SPECTRUM CONTROL INC.
ERIE, FAIRVIEW PENNSYLVANIA

Dwn. KAUFFMAN
Ckd. 7/10/01
Scale NONE

Description
FILTER, SING, Pi, BSHG

1201-052