

# C3225X6S0J107M250AC

TDK Item Description : C3225X6S0J107MT\*\*\*\*



## Application & Main Feature

Commercial Grade ( General (Up to 50V) )

## Series

C3225 [EIA CC1210]



## Dimensions

L 3.20mm +/-0.4mm  
 W 2.50mm +/-0.3mm  
 T 2.50mm +/-0.3mm  
 B 0.20mm Min.  
 G

## Temperature Characteristic

X6S (-55 to 105 degC +/-22%)

## Rated Voltage

0J (6.3Vdc)

## Capacitance

100uF

## Capacitance Tolerance

M (+/-20%)

## Dissipation Factor

15% Max.


## Insulation Resistance

1Mohm Min.


## AEC-Q200

Not Applicable


## |Z|, ESR vs. Freq. Characteristics

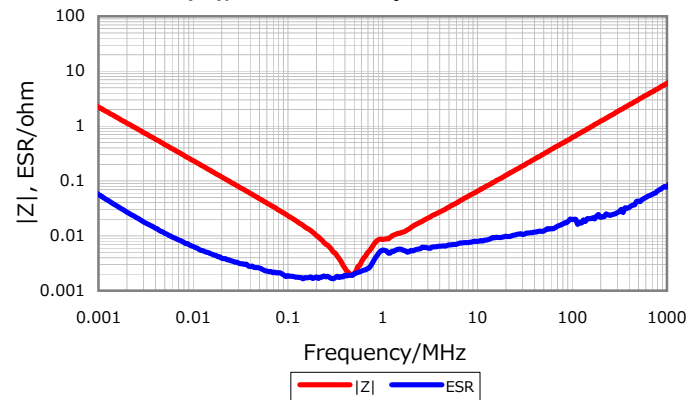


## Cap. vs. Freq. Characteristic

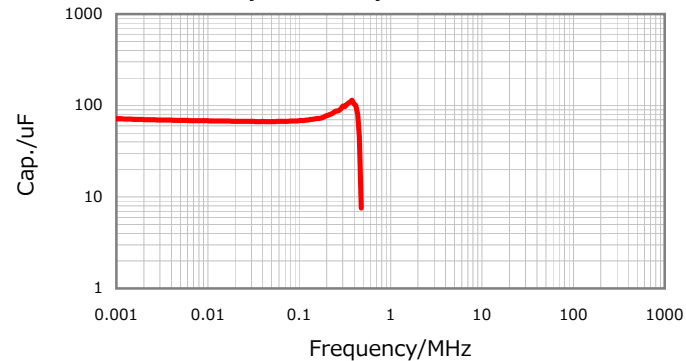


## DC Bias Characteristic

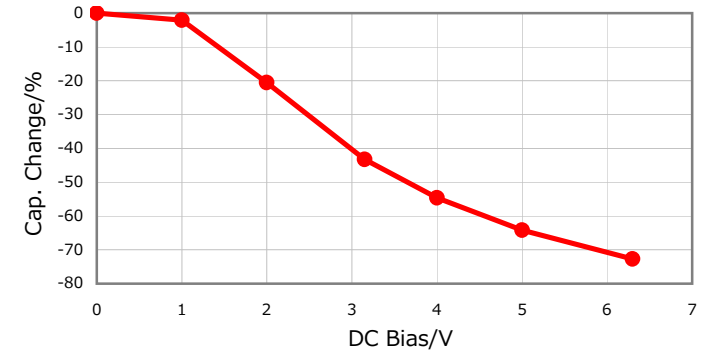

## Temperature Characteristics

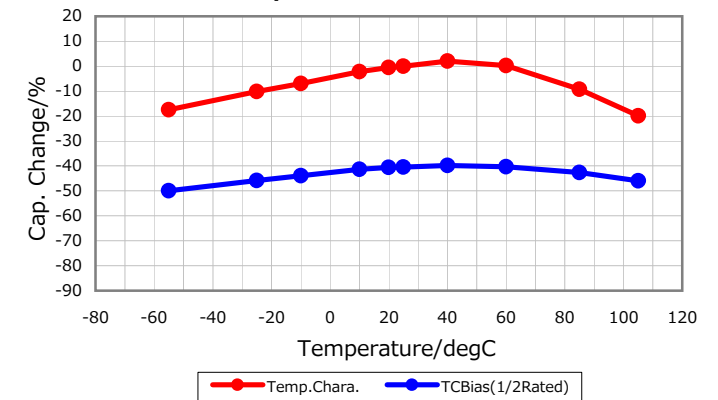

## Ripple Temperature Rise Characteristics

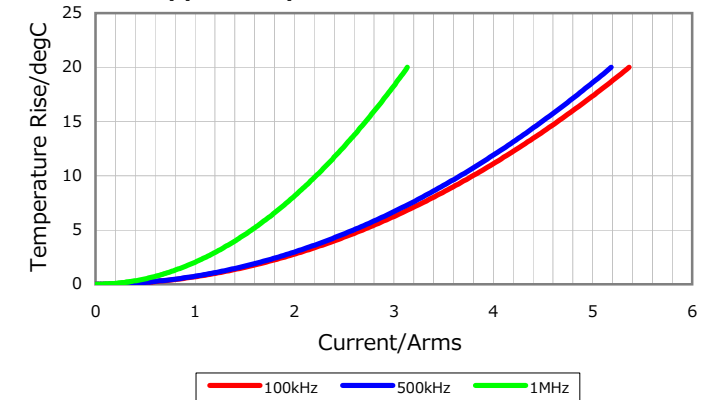

Characterization Sheet ( Multilayer Ceramic Chip Capacitors )



All specifications are subject to change without notice.

January 4, 2016